




RealWoodFloors

WATERSAFE LAMINATE FLOORING

ANDORF



ARCHWAY

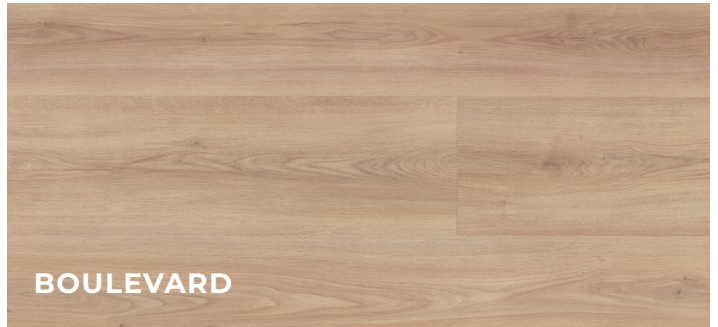


BOULEVARD



CHURCH STEEPLE



MEADOWLAND

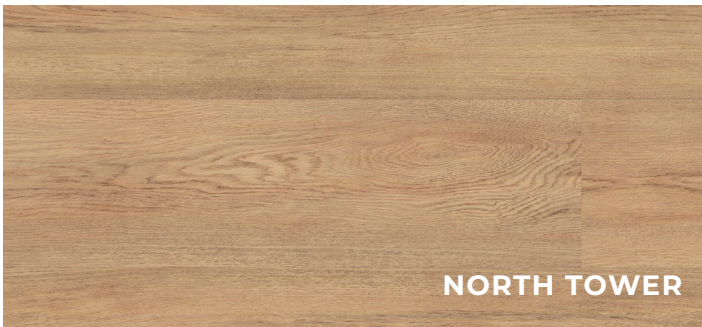

NORTH TOWER



OLD TOWN



PLAZA SQUARE



SPRUCE GROVE

WIDTH 9.6"
LENGTH 54.45"
THICKNESS 8.5mm
AC RATING AC5
TEXTURE Embossed

BEVEL
PAD
LOCKING SYSTEM
BOX SIZE

Pressed Bevel
1mm Pad Attached
REALock Angle Tap
25.43 sqft

WARRANTY
Lifetime Residential Warranty
10 Year Light Commercial

LIENZ



WIDTH 7.6"
LENGTH 50.79"
THICKNESS 10mm
AC RATING AC4
TEXTURE Embossed

BEVEL
PAD
LOCKING SYSTEM
BOX SIZE

Micro Bevel
2mm Pad Attached
REALock Angle Tap
21.44 sqft

WARRANTY
Lifetime Residential Warranty
5 Year Light Commercial

WELS



EARLY MORNING



FRESH PASTRY



GONDOLA



MOUNTAIN ROAD



PEBBLE PATH



RIVER VIEW



SLEIGH RIDE



VIENNA WOODS

WIDTH 7.6"
LENGTH 54.45"
THICKNESS 8mm
AC RATING AC4
TEXTURE Embossed-
in-Register

BEVEL
PAD
LOCKING SYSTEM
BOX SIZE

Micro Bevel
2mm Pad Attached
REALock Angle Tap
20.11 sqft

WARRANTY
30 Year Residential Warranty
5 Year Light Commercial



NeuWood provides the lifelike visuals of real wood with the assurance of an extremely durable and efficiently installed floor. At the heart of each plank is the watersafe EuroCor920, creating a superior high impact resistant floor that utilizes the premium REALock Angle Tap system.




EuroCor920 is denser than traditional HDF, giving you more water protection, durability, and a better locking system.



The TriSeal system combines EuroCor920, a water-tight REALock click system, and a 2mm waterproof seal to give you a watersafe floor.

Certifications

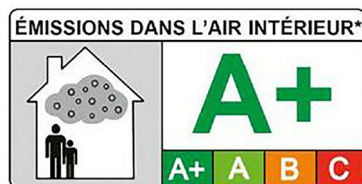

ANTI-BACTERIAL PROPERTIES

The following values of the antibacterial activity were determined in the test according to ISO 22196:2007: Staphylococcus aureus: R > 3.9; Escherichia coli: R > 5.2. A clear antibacterial activity is given for R ≥ 1.

FORMALDEHYDE EMISSION TESTING

Result: 0.2 mg HCHO/hm² - Formaldehyde emissions, determined by ISO 12460-3, is below the max permissible value (< 3.5 mg HCHO/hm²) for coated wood materials according to the Formaldehyde Ordinance valid in Austria & the DIBT Guideline 100 (EI).

WWW.REALWOODFLOORS.COM